




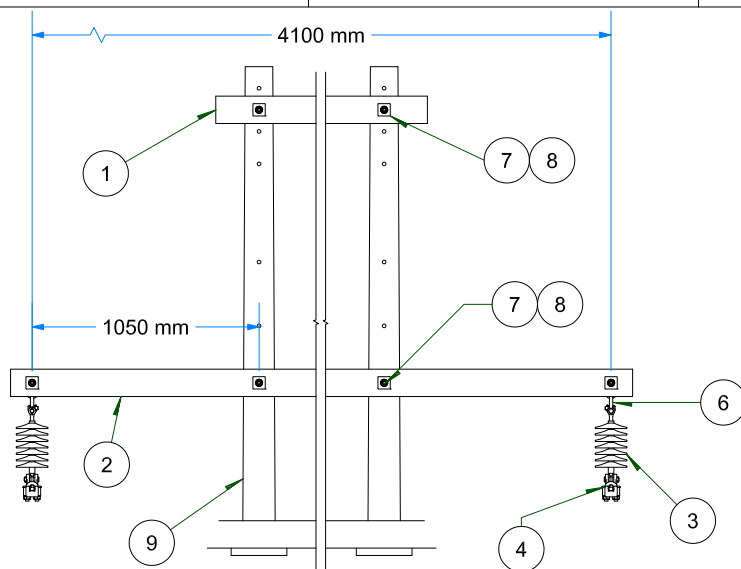


VISTA FRONTAL
ESC: 1 / 35

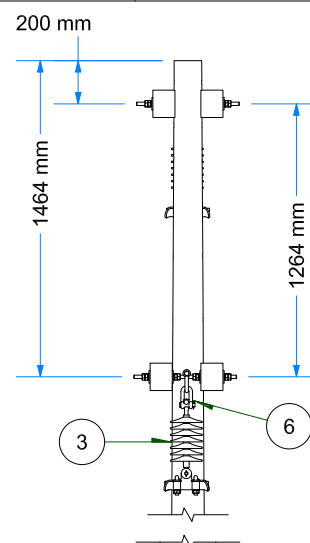

VISTA DE PERFIL
ESC: 1 / 35

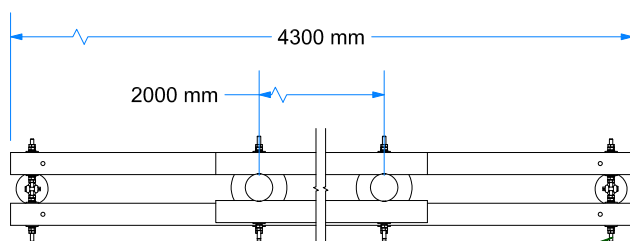

VISTA DE PLANTA
ESC: 1 / 35

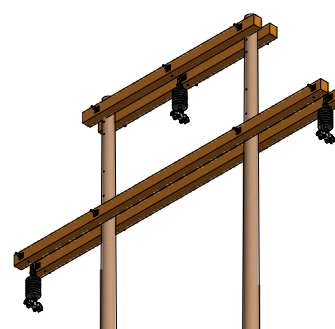

VISTA ISOMETRICA
ESC: 1 / 75

GPV

MODIFICADO:

PESO FERRETERIA (Kg):

PESO AISLADORES (kg):

22.9 kV

MT

MT

MADERA

105,039

6,000

MT-ATH-22.9

2000 mm

4300 mm

VISTA DE PLANTA

ESC: 1 / 35

8

VISTA ISOMETRICA

ESC: 1 / 75

1	I-LP050103	PCM10	CRUCETA DE MADERA TRATADA IMPORTADA 102x127mm, L=2,40 m, ARMADO "H"	und.	2
2	I-LP050104	PCM11	CRUCETA DE MADERA TRATADA IMPORTADA 102x127mm, L=4,30 m, ARMADO "H"	und.	2
3	I-LP090102	ASS03	AISLADOR POLIMERICO TIPO SUSPENSION DE LONGITUD 430 mm., 25 kV	und.	3
4	I-LP150701	CXX09	CINTA PLANA DE ARMAR DE ALUMINIO	und.	3
5	I-LP151101	AXG07	GRAPA DE SUSPENSION DE ALUMINIO PARA CONDUCTORES ENTRE 16 mm² - 95 mm² DE 45 kN	und.	3
6	I-LP181202	AXA01	GRILLETE DE ANCLAJE TIPO RECTO D=16mm C/PASADOR DE SEGURIDAD	und.	6
7	I-LP181502	FAC07	ARANDELA CUADRADA PLANA DE 57 x 57 x 5 mm, D= 17.5 mm	und.	20
8	I-LP181805	FPD05	PERNO DOBLE ARMADO 16 mm, L= 457 mm, CR=77kN C/2T/2C/4A/2AP	und.	7
9	I-LP020105	PPM21	POSTE DE MADERA IMPORTADA DE 12m, CLASE 6D, D1= 127, D2= 258 mm	und.	2
	</				